




- Redundant level measurement
- Latest intelligent Doppler technology
- Sensor-integrated high accurate Hastelloy® pressure diaphragm
- Parameter and measurement data storage on plug-in compact flash card (up to 128 MB)
- Long battery lifetimes thanks to optimised energy-saving process flow
- Various peripheral interfaces
- Measurement without modification of cross-sectional areas in existing profiles
- Easy sensor installation using variable fastening system

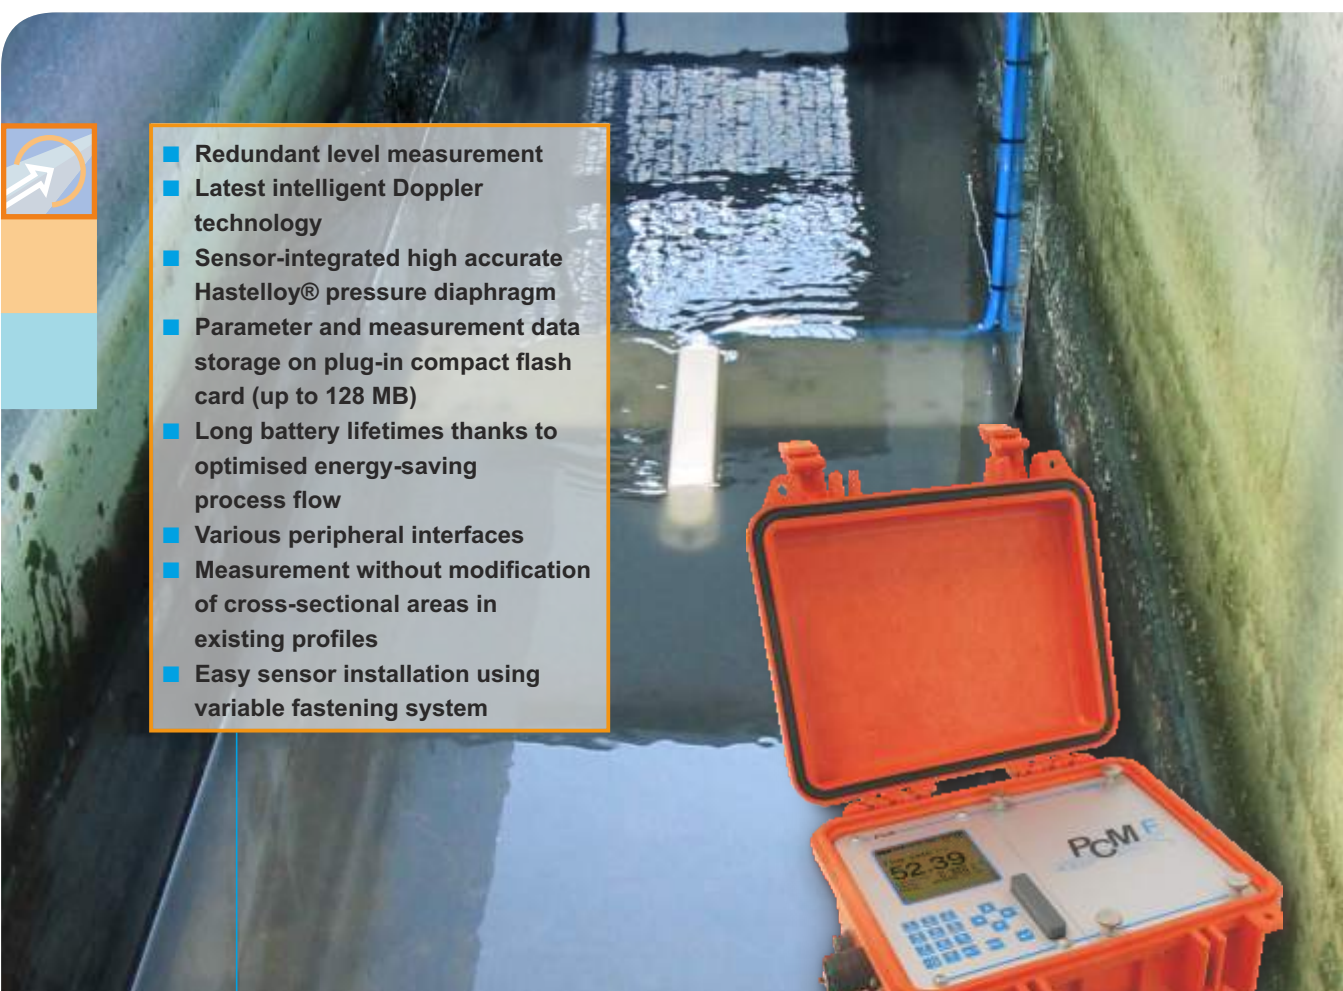

PCM F

PCM F


The PCM F including its accompanying sensors serves as temporary flow measurement for slight to heavily polluted media in part filled and full pipes, channels and flumes.

The large back-lit display enables very comfortable transmitter operation. Parameters can be set very easy due to intuitive dialog mode menus.

In addition to measuring flow using the newly developed intelligent Doppler sensor (which directly evaluates the flow velocity), it is possible to combine the

PCM F with various sensors for level measurement purposes.

Thanks to interfaces, the PCM F can be used as central unit for a variety of peripheral devices. Measured and logged data is saved on plug-in CF memory card.

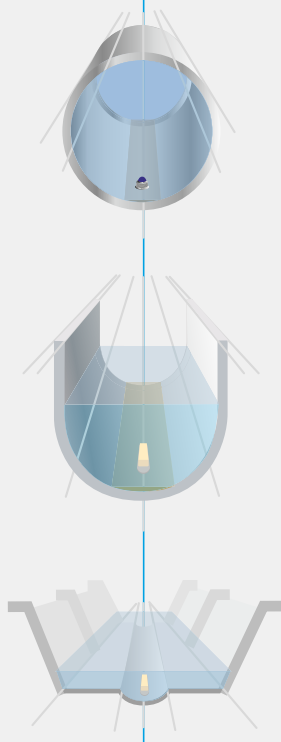

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16



Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес: nsv@nt-rt.ru | <http://nivus.nt-rt.ru>

Technical Information

Enclosure dimensions

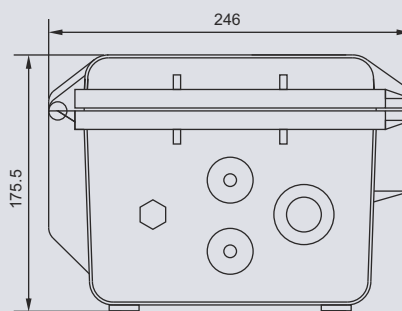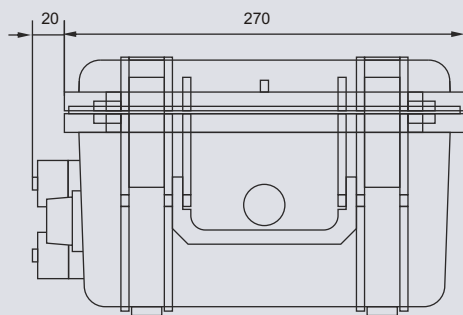

Dimensions in mm

Transmitter

Power supply	• rechargeable battery: 12 V / 12 Ah, lead gel • battery box: for 12 standard batteries 1,5 V (Type LR20) • power unit: 100 - 240 V AC; 50/60 Hz	• 1 x Doppler sensor Type KDA for flow velocity and level measurement • 1 x multifunctional socket for digital and analog inputs and outputs • 1 x connection socket for combined mains adapter and battery charger
Enclosure	• material: Polypropylene, impact resistant • weight: approx. 2.0 kg (without sensor and battery) • protection: IP67 if cover is closed and locked	• 1 x active digital input, supply voltage 3.3 V DC • 1 x analog input, 0/4 – 20 mA (passive)
Operation temperature	-20 °C to +50 °C	
Storage temperature	-30 °C to +70 °C	
Max. humidity	90 %, non-condensing	
Display	back-lit graphic display, 128 x 128 Pixel	
Operation	18 keys, multilingual dialog mode (German, English, French, Italian...)	
Plug sockets (IP68)	• 1 x 4 – 20 mA for external level (2-wire probe, active) or • 1 x air-ultrasonic active sensor Type OCL for level measurement	• 1 x relay (SPDT) switching capacity 250 V AC / 30 V DC, 5A switching frequency 5 Hz • 1 x voltage output 0 – 10 V
		Storage cycle
		1 to 60 minutes, cyclical, depending on events or continuous operation
		Data memory
		• external, on plug-in compact flash card up to 128 MB • internal 8 MB RAM
		Data transmission
		via plug-in compact flash card
		Evaluation software inclusive
		Type: NivuDat for Windows NT / 2000 / XP for data readout, data evaluation, creation of hydrographs, average values, hour, day and month values etc.

Accessories

Rechargeable lead battery	with cable and connection plug, 12 V / 12 Ah
Mains adapter/batt. charger	combi unit for lead gel battery charging or direct mains-powered operation 100 - 240 V AC / 50 - 60 Hz; IP 40
Rechargeable lead battery	for use in external battery box 12 V / 26 Ah
External battery box	for connection to PCM F via charger socket
HF battery charger	for rechargeable lead batteries 12 V / 26 Ah mains voltage 230 V, charging voltage 12 V, charging current 6 A
Battery holder	for 12 standard batteries 1.5 V (Type LR20, batteries are not included)
Connection cable	for connection of peripheral units there are numerous pre-configured connection cables available
Memory card	Type: compact flash card; capacity: 128 MB
Readout adapter	adapter for PCMCIA interfaces, preferably for data readout via Laptop or Notebook
Card reader	with USB interface for connection to PC
Connector-Box	for simultaneous connection of more than one input or output to PCM F multifunctional socket
Suspension bracket	with eyelet for fastening of PCM F on ladders or similar

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес: nsv@nt-rt.ru | <http://nivus.nt-rt.ru>